

Product Sheet

Multispectral Camera for Biomedical Research

MSC2-BIO-1-A



MSC2-BIO-1-A Specifications subject to change Revised March 31, 2021 Version 007



Table of Contents

1. Description	. 3
2. Key Features	. 3
3. Applications	. 3
4. Spectral Characteristics	. 4
Spectral response of the filter set	. 4
5. Anti-X-Talk™ Technology	
6. Specifications	. 4
7. Mechanical Drawings	
8. External Connector Specifications	. 7
9. SDKs	. 8
10. Windows Software (optional)	. 8



1. Description

The MSC2 biomedical research multispectral camera incorporates a high performance 4MP CMOS sensor that is modified with Spectral Devices proprietary multispectral filter array technology. This miniature multispectral snapshot camera simultaneously captures images at 4 distinct bands at 89 frames per second in full frame mode. There is no requirement for additional filters, filter wheels, or tunable filters. The spectral information in the 4 bands is captured simultaneously by the multispectral sensor. The camera offers 4 bands of spectral discrimination at 735 nm, 800 nm, 865 nm, and 930 nm. The camera is USB3 Vision-compliant with many pre-built software options such as 2ndlook graphical camera software. Programmers can build camera applications in Windows and Linux using the included SDKs. Power is supplied through the USB3 interface. The MSC2-BIO-1-A is ultra-compact, ultra-light, and designed for demanding biomedical imaging applications.

2. Key Features

Snapshot Operation (capture spectral images simultaneously) Captures 4 Bands (735, 800, 865, 930 nm) Anti-X-Talk™ Technology (enhances contrast and spectral performance) High Frame Rate (up to 89 FPS in full frame raw mode, 180 FPS in full frame multispectral mode) High Performance (4MP Global Shutter CMOS Sensor) USB3 Vision & GenICam Compliant Ultracompact (28 mm x 28 mm x 47 mm) Ultralight (< 55 g) Low Power Requirement (< 4W from USB cable) Multiple M2 and M4 Mounting Points SDK for Windows and Linux included


3. Applications

The camera is suitable for applications in biomedical research involving detection of hemoglobin and lipids in skin and other tissues.



4. Spectral Characteristics

Spectral response of the filter set



5. Anti-X-Talk[™] Technology

Unique to Spectral Devices is an on-chip technology we refer to as Anti-X-Talk[™] technology. Anti-X-Talk[™] technology works at the filter level and prevents light leakage between individual filters. Without Anti-X-Talk[™] technology, stray light between spectral channels is significant, often exceeding the light leakage due to spectral overlap between adjacent filters. Without Anti-X-Talk[™] technology, images suffer from low contrast and spectral ambiguity. Spectral Devices invented Anti-X-Talk[™] technology to overcome these problems. It works by blocking stray light between adjacent filters, so the pixel response is predictable and directly related to the actual spectral response of the overlying pixelated filter. The result is multispectral images with better spectral discrimination and higher contrast. Furthermore, high quality image data from the MSC2-BIO-1-A can be used as is without the need for proprietary post-processing algorithms and the camera can be used with a wide range of lens types even at large apertures (e.g. f/2).

6. Specifications

Lens Mount	C-mount
Sensor Type	CMOS
Sensor Model	AMS CMV4000
Sensor Format	1-inch
Number of Spectral Channels	8



Image Pixels Per Spectral Channel	512 x 512 (1024 x 1024 interpolated after optional
	debayering)
Effective Pixel Size (H x V)	5.5 μm x 5.5 μm
Capture Method	Area
Spectral Channels	735, 800, 865, 930 nm
Spectral Bandwidth (FWHM)	~25 nm
On-chip Spectral Enhancement	Anti-X-Talk™ Technology
Shutter Type	Global
Sync System	External trigger (Hardware, Software) / Free run
Maximum Frame Rate	8bits output 89 fps
(at Full Frame)	10bits output 45 fps
	12bits output 37 fps
ADC bit width	10bits / 12bits
Video Format	8bits / 10bits / 12bits output
	(Support packed on 10bits / 12bits)
Noise Level	8bits output: <3 digits (Gain 0 dB)
	10bits output: <12 digits (Gain 0 dB)
	12bits output: <48 digits (Gain 0 dB)
Sensitivity (*1)	210 Lux
Exposure time	22 μs to 16.77 seconds
	(Default: 11,116.0 μs)
Digital Gain	0 to 13.9 dB (Default: 0 dB)
Black Level	8bits output: 0 to 15 digits
	10bits output: 0 to 63 digits
	12bits output: 0 to 255 digits
ROI	Horizontal: 32 to 2,048 pixels
	Vertical: 32 to 2,048 lines
	(Default: 2,048 x 2,048)
	Adjustable Steps for size: 16 pixels in horizontal direction /
	4 lines in vertical direction
	Adjustable Steps for offset: 2 pixels in horizontal direction /
	2 lines in vertical direction
Multi ROIs (*2)	8 regions (Default: 1 region)
Binning	Turned off for multispectral readout
Decimation	2x2 decimation effectively doubles multispectral FPS
HDR	Turned off for multispectral readout
Image Flip	Horizontal / Vertical / Horizontal and Vertical / Off
Defective Pixel Correction	Turned off for multispectral readout
Auto Exposure	Supported
Auto Gain	Supported
Operational Mode	Edge preset Trigger / Pulse width Trigger / Start Stop
	Trigger / Free run
User Setting Storage	Supported
Communication	Through USB3.0 bus
Interface	USB3.0 Super speed (USB3.0 micro B)



Protocol	USB3 Vision [®] 1.0.1, GenICam Standard Version (SFNC 2.2,
	PFNC 2.0) compliant
Input / Output	Three GPIOs, One Camera Hardware Reset
Power Input Voltage	+5V (typ.) (This conforms to USB standard)
Power Consumption	Less than 4.0 W
Case Construction	Anodized Aluminum
Mounting Holes	4 x M4 (bottom), 2 x M4 (top), 3 x M2 (4 sides)
Overall Size	28 mm x 28 mm x 47 mm (W x H x L)
Weight	< 55 g
Operational Temperature / Humidity	Minimum Environmental Temperature: 0 deg. C,
	Environmental Humidity: 0 to 85 %RH (No condensation)
	Maximum Camera housing temperature (top plate) shall
	not exceed 55 deg. C
Storage Temperature / Humidity	Environmental Temperature: -30 to +65 deg. C
	Environmental Humidity: 0 to 85 %RH (No condensation)
Vibration	20 Hz to 200 Hz to 20 Hz (5 min. / cycle), acceleration 10 G,
	XYZ 3 directions 30 min. each
Shock Acceleration	38 G, half amplitude 6 ms, XYZ 3 directions 3 times each
Standard Compliancy	EMS: EN61000-6-2, EMI: EN55011
RoHS	RoHS Compliant

(*1) The sensitivity was measured as the luminance when white level achieved 100 % using


the settings and conditions below.

Camera Setting		Environment		
Parameter	Setting	Parameter	Setting	
Gain Up	0 dB	Light Source	Light Box (White)	
AGC	Off	Color temperature	5,100K	
White Balance	Optimum	Lens		
Electrical Shutter	1/30 seconds	F on Lens	F5.6	
Black Level	Optimum	Target Luminance	IM-600 (Topcon)	
Gamma	Factory Setting			

(*2) The multiple ROI regions cannot set on the same horizontal line.



7. Mechanical Drawings

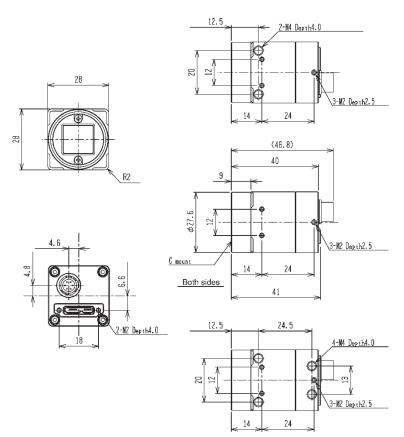

External Connector Specifications 8.

+3.3 to +24 Vdc

signal (IO_VCC)

USB: USB3.0 MicroB type, I/O signals: HR10A-7R-6PB(Hirose) or equivalent External Connectors This connector is for the output signal, not for the power of the camera. The camera power is supplied ⊾ 0 in +5V from the USB cable It does not affect the voltage for the input signal I/O signal connector Pin Assignment Pin No. Signal Name 1/0 Signal Voltage USB3.0 microB connector Low High GND for I/O signal 0V 2 Output 2(IO3) OUT 0.8V or lower +3.3 - +24V 2 3 4 3 Output 1(IO2) OUT 0.8V or lower +3.3 - +24V 4 Input 2(IO1) IN 0.7V or lower +2.5 - +5V Input 1(IO0) IN 5 0.7V or lower +2.5 - +5V 6 Power supply for output [Rear view] *Please use HR10A-7P-6S (Hirose) or equivalent for the cable

7



9. SDKs

Included with the MSC2-RGBN-1-A is an industrial-grade SDK for camera control and image capture. The SDK is compatible with variety of Windows, Linux and MacOS operating systems. It includes drivers, libraries, documentation, and samples. Environments such as Python and OpenCV are also supported.

Operating System	Development Environments	SDK Includes
Windows 10 (32bit / 64bit) Windows 8.1 (32bit / 64bit) Windows 7 SP1 (32bit / 64bit)	Visual Studio 6 Visual Studio 2003 Visual Studio 2005 Visual Studio 2008 Visual Studio 2010 Visual Studio 2012 Visual Studio 2013 Visual Studio 2015 MinGW (Minimalist GNU for Windows) embarcadero Free C++ Compiler Python 3.6.x Python 3.7.x	Windows driver Windows SDK StApi (Visual C++, .net Framework 2.0, C) StGenTL module Viewing Software (StViewer) Sample Programs (Visual C++, Visual C#, Visual Basic, C) DirectShow Filter Documentation
Ubuntu 18.04 (64bit) Ubuntu 18.04 (ARM 64bit) Raspberry Pi OS (32bit)	Python 3.6.x Python 3.7.x	StApi (C++, C) StGenTL module Viewing Software (StViewer) Sample Programs (C++, C) Documentation
MacOSX Sierra MacOSX High Sierra MacOSX Catalina	Python 3.6.x Python 3.7.x	StApi (C++) StGenTL module Viewing Software (StViewer) Sample Programs Documentation

10. Windows Software (optional)

2ndLook is a complete image acquisition software package that enables users to connect and acquire images from one or more multispectral cameras on a single PC. Offers real-time synchronized video recording from GenICam-compliant USB3 Vision, GigE Vision, and DirectShow cameras (Figure 10.1). Easily record directly to popular file formats such as AVI and TIFF. Record from multiple cameras to different file formats concurrently. Multispectral imaging conversion filters for Spectral Devices cameras are built in (Figure 10.2). View montage of spectral images in real-time (Figure 10.3). Easy to use interface with interactive help and user guides. Demo version provides all features, except save to disk function.



Record	► Review	🖹 🛠 🕐 🕐 🍠				v 💽 🚺
5 🖾 H 🗄 🕫 📢 🕯	\$ 4	Camera (Detected: 49.9 (be)				2.0 × 1 4 4 4 4 4
Cameras	₩₩≣X▲					
🖉 📻 Camera	۰ ۲			The second distance		
Driver Convention Record Control						
Cornect Balk Advanced			and the second second			
Refrech Hole the camera mindow to char	nge disibled settings		and the second second			
Formet and Resolution			And the Party of t			
Analy						and the second se
Poel Format Rono 3-bit	[*]		And in case of the local division of the loc			50 JUL
Web (2040 (*) (8, 2048)						
Height (30.00 (+) (4, 20.40)			Concentration of the local division of the			
Brong Horstonial 1 2 [1, 4] Brong livestual 1 2 [1, 4]			and the second s	and the owner of the owner owne		
					CONTRACT OF A DESCRIPTION OF A DESCRIPTI	
Deplay and Acquisition					11111	
Exposure Time 20000.000000 us 🔅 [100.000000, 54296128.000000] +					
	<u>197</u>					
User Set	1000					
Power Up User Set Factory riefs its	*					
Over Set To Load/Save Prictury oxfaults	1.		The second s	. Hillien	and the owner water of the owner	
Loui Sece			State of the Owner	State of the state of the state of the	2010年1月1日日	
36.0					DISPRISE OF TAXABLE PROPERTY OF	
			and the second second second	A second second second second		195
		2940x2048 2017-04-10 15:26:23:417	Xi Ib			
				91.5%		
	Start		Elapsed		Remaining	Memory
		-		-		-
						Activate Windows
						TIFE 15:26

Figure 10.1. Real-time display of raw multispectral images.





Figure 10.2. Multispectral conversion filters





Record	► Review	📑 🛠 🖆 🙆 🎉		K 💽 🚺 🔯
🗞 🕸 🐂 🗄 🗊 🚳	<	Camera (Detected: 49.9 fps)	0.84 😵 🗈	
Cameras	■ 🗮 🗮 👗 🛦			
Camera				
Driver Conversion Record Control				
Conversion Sequence				
Hulti Spectral Demosaic	🔺 🗶 🐐 🛸			
Camera Type 4-band Monochrome	- 21		and the sector of the sector o	
Pre Processing Method Poxel Location			THE REAL PROPERTY AND INCOMENTS	
Band 1 Pixel 1,1	• 2)			
Band 2 Poxel 1,3	• 19			
Band 3 Pixel 3,1	• 18		Contraction of the local division of the loc	
Band 4 Pixel 3,3 Calibration Path	- 13			
Calibration File				
Display Plane Al	• 13			
Red Gain 1				
Blue Gain 1	a			
NOVI Plane 1 Mono/Band 4	• •		the second se	
NOVI Plane 2 Green/Band 2	• 20			
Positive Only 🕱				
Rest	Calor-Balance			
		1024x1024 2017-04-10 15:10:19.398	X: It	
			91.5%	
	Start	-	Elapsed Remaining	Memory 28% 0 100
				TIFF 15:10:19

Figure 10.3. Real-time display of multispectral images in montage format. Example here collected with 4-band multispectral camera for agriculture.